DANGEROUS GOODS STORAGE SPECIALISTS

Phone: 1300 903 933

Email: office@wssa.com.au

Web: www.wssa.com.au




Flammable liquids safety cabinet - 1x pallet (4 x 205L drums storage capacity)

APPLICATION

For the safe and secure indoor storage of Class 3 flammable liquids and combustible liquids.

FEATURES

- Double wall construction with 40mm thermal barrier
- Vent ports with integral flash arrestors fitted on each side
- Two self-closing doors with stainless steel, three point bullet self-latching system
- Adjustable hydraulic door closure
- Flush mount handle and key lock
- Continuous piano hinges on doors deliver smooth closure
- One adjustable shelf plus fixed base shelf
- Internal 250L spill containment bund with suspended perforated floor
- Durable UV stabilised thermosetting polyester powder coat finish
- · Grounding connector enables earthing if required
- External forklift bumper
- Adjustable screw-in feet for optional elevation

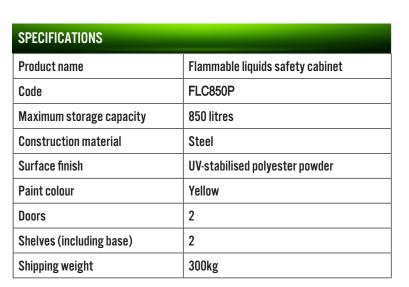

MANUFACTURED TO MEET THE REQUIREMENTS OF		
AS1940-2017	The storage and handling of flammable and combustible liquids	
AS1319-1994	Safety signs for the occupational environment	
ADG CODE 7.5	Australian Dangerous Goods Code 2017 Edition 7.5	
AS4506-2005	Metal finishing - Thermoset powder coatings	





DIMENSIONS (W x D x H)		
External dimensions	1405mm x 1560mm x 1690mm	
Internal dimensions	1295mm x 1205mm x 1335mm	



Class 3: Flammable Liquids

Flammable liquids are liquids, or mixtures of liquids, or liquids containing solids in solution or suspension (for example, paints, varnishes, lacquers, etc., but not including substances otherwise classified on account of their dangerous characteristics) which give off a flammable vapour at temperatures of not more than 60 °C, closed-cup test, or not more than 65.6 °C, open-cup test, normally referred to as the flash point.

Referenced from the Australian Dangerous Goods Code, 2017, Edition 7.5 $\,$